




ATEX Certified for Zone 1 and 2 compliance:

-  II 2 G Ex eb mb op is IIC T5...T6 Gb
-  II 2 D Ex op is tb IIIC T80°C Db
- -40°C to 55°C Ambient Temperature
- ATEX-2014/34/EU
 - EN 60079-0:2012+A11:2013
 - EN 60079-7:2015
 - EN 60079-18:2015
 - EN 60079-31:2014
- EMC-2014/30/EU
- RoHS-2011/65/EU
- RoHS-2015/863/EU
- LVD-2014/35/EU
- IK10



Key Features:

- 1 Low-profile, lightweight design, high quality aluminum housing.
- 2 Impact resistant diffused lens
- 3 Stainless steel bracket for ceiling mount.
- 4 Professional light distribution, uniform illumination through the entire space.
- 5 With single-ended feedthrough or double-ended feedthrough optional.

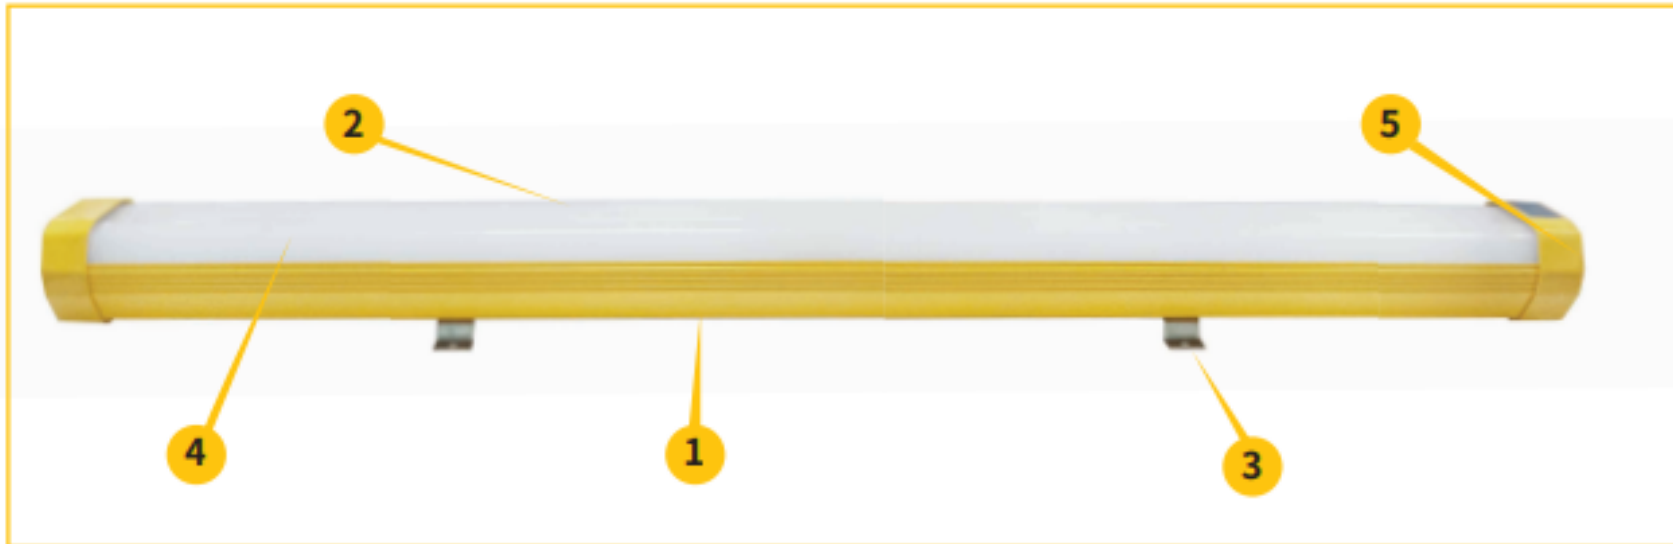



Additional Features:

- Standard 6-12KV surge protection
- Feed-through capable
- Enclosures attached to back brackets for pendant pole mount, pendant chain mount and 45 degree wall mount.
- Clear lens optional
- 5-year warranty

Standard Materials:

- Side cover:ADC12
- Gaskets: one-piece neoprene
- Body:6063 aluminum (less than 0.4% copper content) with yellow-painted.
- Brackets: stainless steel
- Lens: polycarbonate

Features & Benefits:

- 1 Environmentally Friendly 50,000 hrs lifetime.
- 2 Superior color rendering index compared to HPS, LPS or MV.
- 3 Low temperature applications to -40°C and high temperature up to 55°C.
- 4 Best-in-class efficacy-Up to 110 lumens per watt.
- 5 Professional light distribution design, uniform and comfortable lighting.
- 6 Temperature compensation technology for longer life.
- 7 Low maintenance costs and power consumption reduced by over 50%.

Fixture Dimensions(mm):

	Dimensions(mm)	Net Weight(kg)
300mm models	L=385	2.8
600mm models	L=685	4.5
1200mm models	L=1285	7.5

